


FASTLINK


EDGE
TACTICAL
SAFETY EYEWEAR



The blade-style Fastlink has a lightweight, economical range design that provides complete coverage and eye protection. Its flexible and durable matte black frame is equipped with a soft thermoplastic rubber nosepiece and temple tips to create a comfortable, nonslip fit. The single-piece lens has no lower frame to obstruct sight, making it great for shooting.

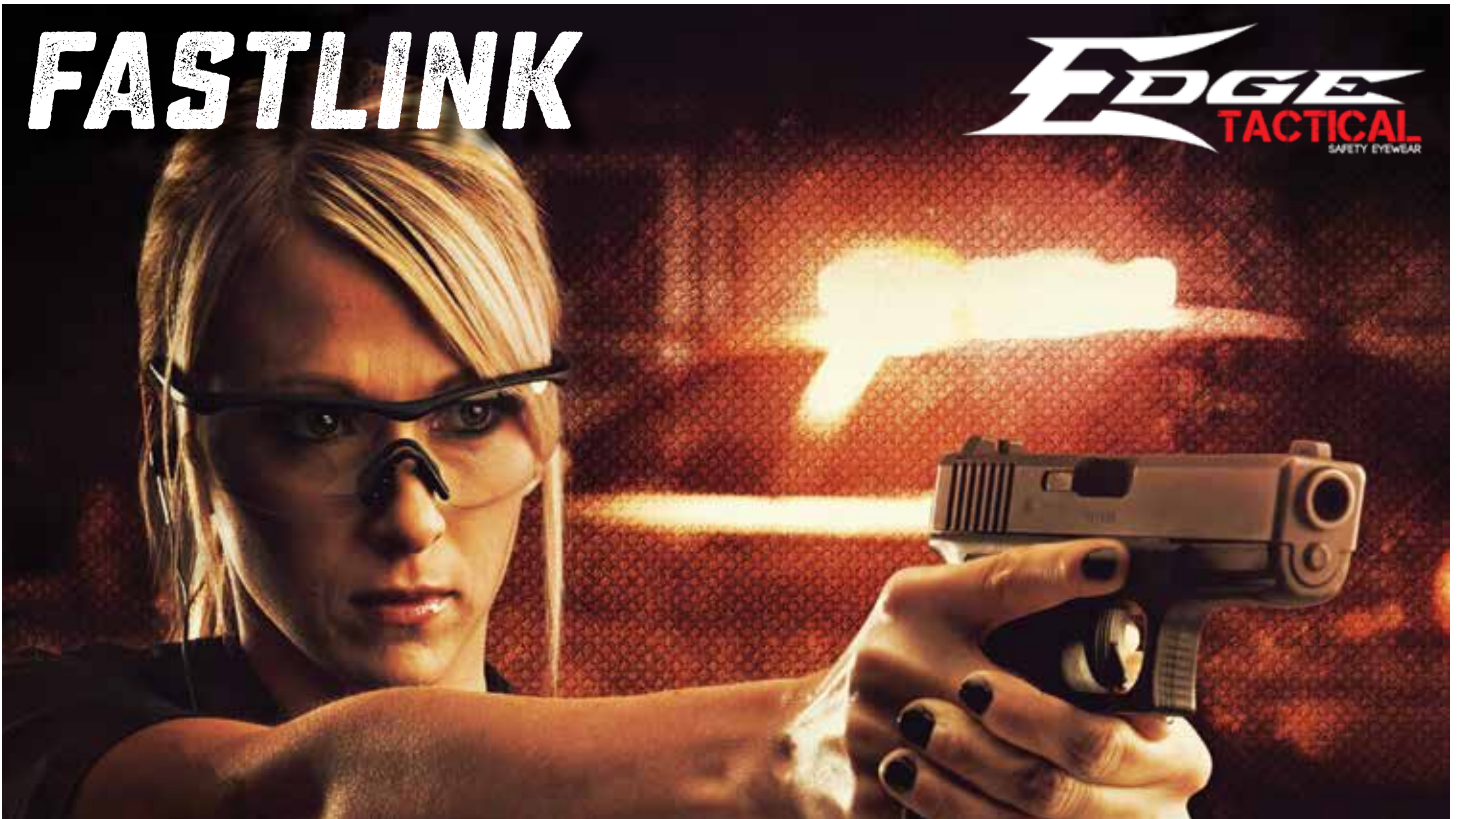

CHARACTERISTICS

BALLISTIC PERFORMANCE	MEETS OR EXCEEDS THE FOLLOWING STANDARDS: >> ANSI/ISEA Z87.1-2020 >> EN 166:2001 >> MCEPS 1996																	
LENS	<p>COLORS:</p> <p>CLEAR - CLASSIC LENS WITH PRISTINE CLARITY. MAXIMUM LIGHT ALLOWANCE FOR USE INDOOR OR IN OTHER LOW-LIGHT CONDITIONS. 85% LIGHT TRANSMISSION - BLOCKS 99.9% OF UVA, UVB & UVC RAYS. MARKING: E+</p> <p>G-15 - MAXIMIZES TRANSMISSION OF GREEN AND YELLOW LIGHT FOR TRUE-TO-LIFE COLOR AND REDUCED EYE STRAIN IN BRIGHT CONDITIONS. 11% LIGHT TRANSMISSION - BLOCKS 99.9% OF UVA, UVB & UVC RAYS. MARKING: E+S</p> <p>TIGER'S EYE - TIGER'S EYE LENSES MAKE OUTDOOR CONDITIONS APPEAR SHARPER BY FILTERING HIGH LEVELS OF BLUE LIGHT TO ALLOW FOR GREATER DEPTH PERCEPTION AND A BRIGHTER VIEW OF SURROUNDINGS. 50% LIGHT TRANSMISSION - BLOCKS 99.9% OF UVA, UVB & UVC RAYS. MARKING: E+S</p> <p>FEATURES:</p> <p>VAPOR SHIELD ELITE PERFORMANCE ANTI-FOG TRIPLE COATED ANTI-SCRATCH</p>																	
FRAME	<p>COLORS:</p> <p>BLACK</p> <p>MARKING:</p> <p>EZ87+, EN166 S</p>	SIZE	<p>DIMENSIONS:</p> <table border="0"> <tr> <td>1.</td> <td>TIP TO TIP</td> <td>88 +/- 5 MM</td> </tr> <tr> <td>2.</td> <td>SCREW TO SCREW</td> <td>145 +/- 5 MM</td> </tr> <tr> <td>3.</td> <td>OVERALL WIDTH</td> <td>150.5 +/- 5 MM</td> </tr> <tr> <td>4.</td> <td>OVERALL HEIGHT</td> <td>49 MM</td> </tr> <tr> <td>5.</td> <td>LENS HEIGHT</td> <td>46 MM</td> </tr> </table> 	1.	TIP TO TIP	88 +/- 5 MM	2.	SCREW TO SCREW	145 +/- 5 MM	3.	OVERALL WIDTH	150.5 +/- 5 MM	4.	OVERALL HEIGHT	49 MM	5.	LENS HEIGHT	46 MM
1.	TIP TO TIP	88 +/- 5 MM																
2.	SCREW TO SCREW	145 +/- 5 MM																
3.	OVERALL WIDTH	150.5 +/- 5 MM																
4.	OVERALL HEIGHT	49 MM																
5.	LENS HEIGHT	46 MM																
SKUS	<table border="0"> <tr> <td>XFL610</td> <td>FASTLINK - MATTE BLACK FRAME / TIGER'S EYE VAPOR SHIELD LENS</td> </tr> <tr> <td>XFL611</td> <td>FASTLINK - MATTE BLACK FRAME / CLEAR VAPOR SHIELD LENS</td> </tr> <tr> <td>XFL61-G15</td> <td>FASTLINK - MATTE BLACK FRAME / G-15 VAPOR SHIELD LENS</td> </tr> </table>			XFL610	FASTLINK - MATTE BLACK FRAME / TIGER'S EYE VAPOR SHIELD LENS	XFL611	FASTLINK - MATTE BLACK FRAME / CLEAR VAPOR SHIELD LENS	XFL61-G15	FASTLINK - MATTE BLACK FRAME / G-15 VAPOR SHIELD LENS									
XFL610	FASTLINK - MATTE BLACK FRAME / TIGER'S EYE VAPOR SHIELD LENS																	
XFL611	FASTLINK - MATTE BLACK FRAME / CLEAR VAPOR SHIELD LENS																	
XFL61-G15	FASTLINK - MATTE BLACK FRAME / G-15 VAPOR SHIELD LENS																	